



P120E "A"

Modular electric oven for pizzeria

COMPOSITION WITH 1 BAKING CHAMBER



OPTIONS AND ACCESSORIES (WITH SURCHARGE)

- ☐ Leavening prover on wheels, height 800mm
- ☐ Support with wheels, height 600mm
- ☐ Support with wheels, height 800mm
- ☐ Support with wheels, height 950mm
- ☐ Additional tray holder guides for compartment and support
- ☐ Spacer element height 300mm
- ☐ Suction hood

(WITHOUT SURCHARGE)

- ☐ Front vapour collection hood in stainless steel sheet

EXTERNAL CONSTRUCTION

- ☐ Structure made in folded stainless steel
- ☐ Side panels in pre-painted sheet metal
- ☐ Stainless steel hood with aluminised steel top cover
- ☐ Front vapour collection hood in enameled steel sheet
- ☐ Steam duct in stainless steel plate
- ☐ Stainless steel double door with bottom hinge and spring balance
- ☐ Tempered glass element
- ☐ Handles in thermoplastic material
- ☐ Control panel on front right hand side

INTERNAL CONSTRUCTION

- ☐ Refractory brick cooking surface
- ☐ Aluminated steel top and side structure
- ☐ Rock wool heat insulation

FUNCTIONING

- ☐ Heated by armoured heating elements
- ☐ Electronic temperature management with independent adjustment of ceiling and floor
- ☐ Maximum temperatura reached 450°C
- ☐ Continuous temperature monitoring with thermocouple
- ☐ Vapour ducting using manual butterfly valve

STANDARD EQUIPMENT

- ☐ Lighting with halogen lamp
- ☐ Timer
- ☐ Economiser
- ☐ Independent maximum temperature safety device
- ☐ 20 customisable programs



MORETTI FORNI S.P.A.

www.morettiforni.com

marketing@morettiforni.com

Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA


Tel. +39.0721.96161 - Fax +39.0721.9616299



P120E "A"

1 baking chamber height 18cm

(assembled with support height 950mm)

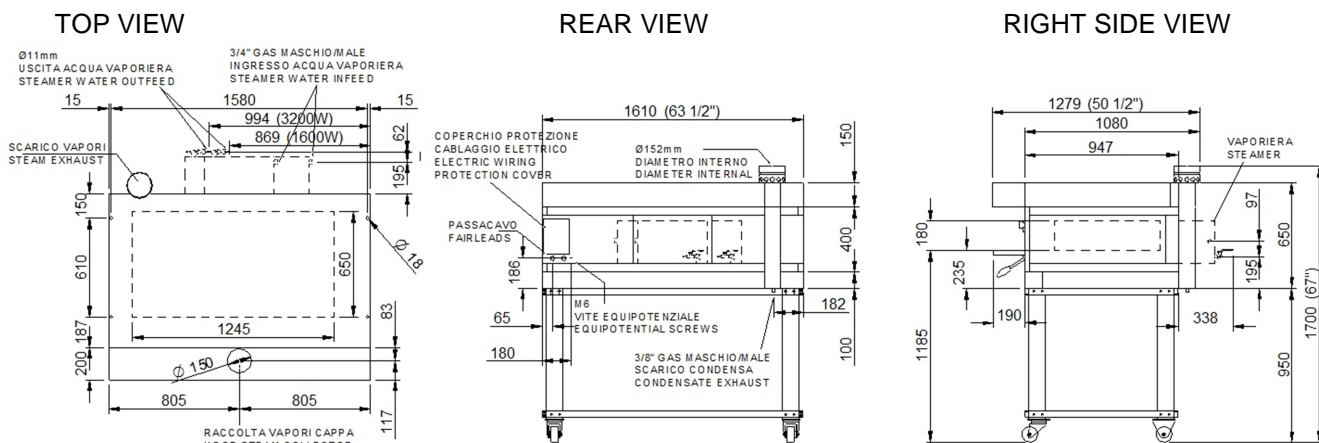

Nota: The dimensions indicated in the views are in millimetres. Steamer for Bakery only.

SPECIFICATIONS

The appliance comprises one cooking element and an optional leavening compartment or support. The oven cooking surface is made of refractory, allowing perfect heat distribution over the whole surface and making this oven particularly suitable for use by pizza cooks. Temperature adjustment is electronic, with independent control of the ceiling and floor heating elements. The oven door is hinged at the bottom, with a tempered glass window to check the state of the product while it is cooking. The support comprises a painted metal structure, whereas the leavening compartment has a stainless steel structure and is fitted with a heating thermostat. The leavening compartment can reach a maximum temperature of 65°C, whereas the maximum temperature of the baking chamber is 450°C

All the data provided below refer to the configuration with 1 baking chamber

DIMENSIONS		SHIPPING INFORMATION		FEEDING AND POWER	
External height	750mm	Packed in wooden crate		Standard feeding	
External depth	1279mm	Height	900mm	A.C. V400 3N	
External width	1610mm	Depth	1452mm	Feeding on request	
Weight	237kg	Width	1810mm	A.C. V230 3	
Baking surface	0,8m ²	Weight	(237+50)kg	Frequency	50/60Hz
TOTAL BAKING CAPACITY		When combined with leavening compartment or support:		Max power	8,6kW
				Average power cons	4,3kWh
				Connecting cable	
				type H07RN-F	
				5x4mm ² (V400 3N)	
Tray (600x400)mm	3	Max height	1850mm	4x6mm ² (V230 3)	
		Max weight	(328+60)kg		
Pizza diameter 300mm	8				
Pizza diameter 450mm	2				
		Power supply (optional prover)			
		A.C. V230 1N 50/60 Hz			
		Max power			
		Average power cons			
		Conn. Cable type			
		3x1,5mm ²			
		H07RN-F			

* This value is subject to variation according to the way in which the equipment is used

- NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice