
specifications



PGLL150r

SKOPE Pegasus Horizontal 1/1 & 2/1 REMOTE Lowline Chiller (RH52LL)

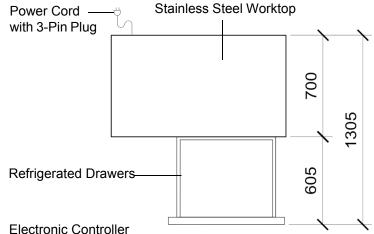

CABINET DIMENSIONS


 External
 Internal


 Height:
 520mm*
 370mm

 Width:
 1200mm
 700mm

 Depth:
 700mm
 555mm

Floor area: 0.84m²

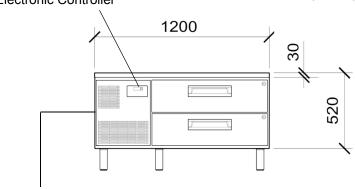



Side Mounted Remote Refrigeration Unit

Copyright © 2008 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system: Electronic controlled, side mounted, remote refrigeration unit

Refrigerant: Thermostatic expansion valve fitted as standard to suit R134a or R404A

Pipe connection size: Liquid line: 1/4". Suction line: 3/8"

Remote refrigeration duty: 300 Watts

Cabinet internal volume: 150 litres

Insulation: 60mm thick, high density cyclo-isopentane polyurethane foam

Cabinet temperature range: +1°C to +4°C up to 40°C ambient

Drainage: Evaporator drain fitted inside service compartment (requires plumbing)

Electrical: 230-240 Volts a.c. 50 Hz, 0.32 Amps

Internal lighting: n.a.

Drawers: Two refrigerated stainless steel drawers with individual key locks

(638mm wide x 508mm deep x 109mm high)
- to fit 1 x 2/1 or 2 x 1/1 pans up to 100mm deep

Worktop: Heat resistant stainless steel worktop

Shelves: n.a.
Weight: 85 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0237 Rev 2.1 Apr. 2016





^{*} Height excludes castors or adjustable legs.