

PRODUCT ADVANTAGES



TECHNICAL DATA


Cycle times*	1. 80sec 2. 150sec 3. 170sec 4. Continuous (20mins)
Water consumption	1 l/rack
Tank capacity	10.6 l
Tank heating	0.8 kW
Power supply	415 / 50 / 3N (240 / 50 / 1)
Booster loading	
Standard	6.2 kW
Alternative	4.1 kW
Total loading	
Standard	7.7 kW 3 x 15 A
Alternative	5.6 kW 25 A
Wash pump	0.6 kW 350 l/min
Rack size	500 x 500
Loading height	425 mm
Noise level	60.5 dB (A)
Weight (gross / net)	70 / 60 kg

- **TOP-DRY:** integrated drying technology - no need for manual drying.
- **VAPOSTOP²:** integrated steam condensation allows door opening without steam cloud. Also no steam escape during the condensation phase
- **VISIOTRONIC-TOUCH control:** single button control with colour code and remaining cycle time indication. With colour display and touch.
- **WASHSMART APP:** controlling your warewash operation with smart technology: status and messages, usage and operating cost, hygiene, order service and consumables
- **Eco programme:** switchable steam rinse cycle reduces fresh-water consumption to 1.0 l. Saving of up to 60 % water and detergent as well as up to 60 % rinse aid
- **SENSO-ACTIVE resource management:** constantly measures the quality of the wash water and keeps the amount of rinsing needed in each rinse cycle to the minimum in order to guarantee a fully hygienic wash result. This reduces the amount of fresh water used per rinse cycle up to 1.0 l
- **2IN1 double rack system:** two racks can be washed in a single wash cycle. One rack of cups can be washed underneath, while a second rack containing dishes and cutlery can also be washed above it. Thanks to the optimum use of the entire wash chamber the performance of the machine can be doubled
- **CLIP-IN wash and rinse arms:** wash and rinse arms can be removed with one hand and without any tools
- **Intelligent data documentation:** automatic recording of important operational data and consumptions and indication on the display
- **USB-interface:** comfortable download of operational data in form of a protocol via USB
- **GENIUS-X² fine filter system:** advanced filter system with pre-wash function reduces detergent consumption up to 35%
- **Interlocked strainer:** prevents operation without tank strainer
- **Optional refill signal:** monitors contents of external as well as integrated chemical containers
- **Hygiene programme:** for removal of calcium carbonate and other deposits from wash chamber

CONNECTIONS

① Drain hose	2,000 mm ID20/OD25
② Supply hose	2,000 mm R 3/4"
Required flow rate	5 l/min
Flow pressure	0.5 (0.8 with softener)- 6 bar
Max. supply water temperature	60 °C
③ Power cord	2,000 mm
Supply hose for	
④ Detergent	2,500 mm
⑤ Rinse aid	2,500 mm

DIMENSIONAL DRAWING

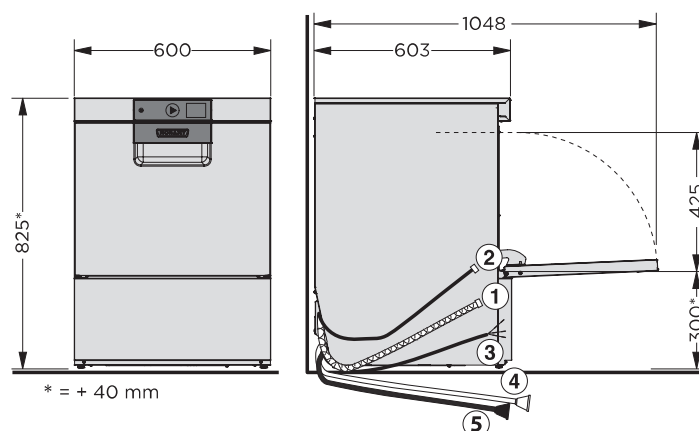

* Thermostop guarantees required temperatures with cold water connection, the actual cycle times extend accordingly.